


70SG PASSIVE GROUNDING CLAMPS WITH SPIRAL CABLE

Zones 0, 1, 2, 20, 21, 22

Full catalogue available on our website: www.inpratex.com

ATEX GROUNDING CLAMPS

ZONES 0, 1, 2 (gas) & 20, 21, 22 (dust)

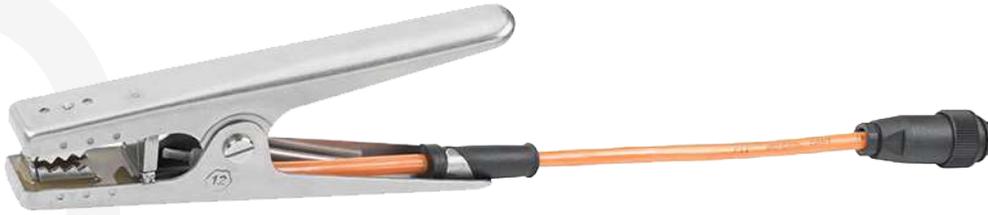

Passive ATEX grounding clamps for the temporary grounding of tank trucks or tankers during transfer either of liquids or hazardous substances. Electrostatic charges are discharged effectively

Supplied with 5m of orange spiral cable, assembled with an ELM00714 plug. (1 m extendable to max. 5 m).



EU-Type Examination Certificate

ITEM REFERENCES

Designation:	Clamping width:	Clamping force:	Spiral cable length:	Item No.:
70SG	35 mm	140 N \pm 20%	5 m	6D0710

70SG CLAMP TECHNICAL SPECIFICATIONS

Clamp Marking:	 II 1G IIB T6 Ga, II 2G IIC T6 Gb, II 1D T80°C Da
Certificate:	EU-Type Examination Certificate
Clamp material:	Stainless steel
Operating temperature:	-20°C to +70°C
Ground cable: (color: orange)	Oil and gasoline resistant control lead H07BQ-F, 3 x 1.5 mm ² Temperature range -40...+90°C With fixed wire end ferrule 4-poles coupling plug
Dimensions:	See fig
Weight:	Approx. 0.6 kg
Earth leakage resistance:	235 kOhm \pm 10%
Max. discharge voltage:	I max = 10A
Chemical resistance:	Oil and gasoline

