

GRP JUNCTION BOX 4 CABLE ENTRIES - 6 TERMINALS

Zones 1, 2, 21, 22

Full catalogue available on our website: www.inpratex.com



ATEX JUNCTION BOXES

ZONES 1, 2 (gas) & 21, 22 (dust)



GRP (glass-reinforced polyester) junction box, suitable for use within ATEX rated Ex e Increased Safety areas.

Equipped with 4 cable entries and 6x 2,5mm² + 4 PE terminals.

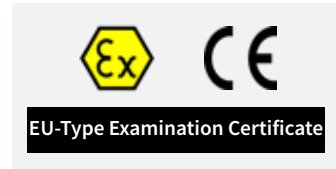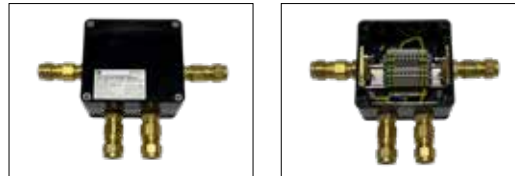

ITEM REFERENCES

Designation:	Cable entries:	Item No.:
A21-E1-01209+6T2,5+4M20 L1	4 brass cable gland M20x1,5 (9-15,5 mm)	5A0610
A21-E1-01209+6T2,5+4M20 LN1	4 nickel plated brass cable gland M20x1,5 (9-15,5 mm)	5A0611
A21-E1-01209+6T2,5+4M20 L2	4 brass cable gland M20x1,5 (13,2-20,5 mm)	5A0612
A21-E1-01209+6T2,5+4M20 LN2	4 nickel plated brass cable gland M20x1,5 (13,2-20,5 mm)	5A0613
A21-E1-01209+6T2,5+4M20 TP	4 plastic plugs M20x1,5 (Earthing plates included)	5A0614

TECHNICAL SPECIFICATIONS

Marking:	II 2G Ex eb IIC T6 Gb II 2D Ex tb IIIC T80°C Db
Certificate:	EU-Type Examination Certificate
Operating temperature:	-20°C to +40°C
Housing:	Glass Reinforced Polyester (GRP)
Dimensions:	122x120x90 mm
Rated voltage:	max. 500V
Rated current:	max. 16 A
Terminals:	6x 2,5mm ² + 4 PE
Ingress protection:	IP65
Cable entries:	4x M20x1,5

