

KE-LED-EX 4003 HAND LAMP

Zones 1, 2, 21, 22

Full catalogue available on our website: www.inpratex.com

ATEX PORTABLE LAMPS

ZONES 1, 2 (gas) & 21, 22 (dust)

The extremely compact, lightweight ATEX hand lamp is ideal for illuminating areas that are difficult to access and where inspection and service are necessary. Three integrated POWER LED modules ensure optimal lighting.

Thanks to the integrated diffuser film, a glare-free and pleasant work is guaranteed. Ideal for use as an inspection lamp.

- 3 POWER LEDs / 6500 K
- Protection tube: polycarbonate, shock-resistant, Ø 40mm
- Handle / end cap: neoprene, black
- Integrated diffuser foil
- Metal hook: yes, plastified, rotatable
- Protection category: IP68 -50 m / 5 h
- Protection class: II / III
- Cable: 10m H07RN-F 2 x 1,00 mm²
- Voltage: 230V / 110V / 42V / 24V / 12V






EU-Type Examination Certificate

ITEM REFERENCES

Designation:	Power:	Rated voltage:	Rated current:	Luminous flux:	Protection class:	Item No.:
KE-LED-EX 4003/230	3,3 W	230 V AC	0,03 A	200 lm	II	1D0603
KE-LED-EX 4003/110	3 W	110 V AC/DC	0,025 A	185 lm	II	1D0604
KE-LED-EX 4003/42	3,8 W	42 V AC/DC	0,075 A	180 lm	II	1D0605
KE-LED-EX 4003/24	3 W	24 V AC/DC	0,10 A	255 lm	III	1D0606
KE-LED-EX 4003/12	2,8 W	12 V AC/DC	0,20 A	235 lm	III	1D0607

TECHNICAL SPECIFICATIONS

Marking:	 II 2G Ex eb mb op is IIC T4 Gb  II 2D Ex tb op is IIIC T105° Db IP68
Certificate:	EU-Type Examination Certificate
Operating temperature:	-20°C to +50°C
Protective tube:	Polycarbonate
Impact resistance:	IK10
Ingress protection:	IP68-50m/5h
Color temperature:	6500K
Handle / end cap:	Neopren
Weight:	1,55 kg
Cable:	10m H07RN-F 2x1 mm ² (plug non included)

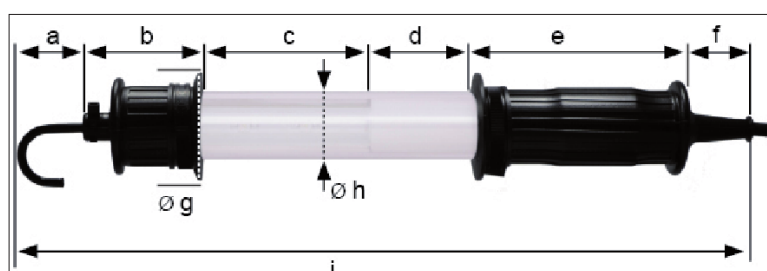

DIMENSIONS (mm)

a	b	c	d	e	f	g	h	i
40	65	100	70	115	40	43	40	430