

LED HIGH BAY LIGHT FITTINGS SERIES ND8301/ND8302

Zones 2, 22

Full catalogue available on our website: www.inpratex.com

ATEX PENDANT LIGHT FITTINGS

ZONES 2 (gas) & 22 (dust)

Explosion-proof LED high bay light fittings certified for hazardous locations, of Zones 2 (gas atmosphere) and 22 (dust atmosphere), for production halls and warehouses, in industrial sectors, workshops and chemical factories, etc.




Two versions are available: 1 or 2 LED wings for substitution of 250W / 400W high pressure discharge lamps.



Declaration of Conformity

DALI interface (standard) for dimmed operation.

Note: Suitable for indoor use only.

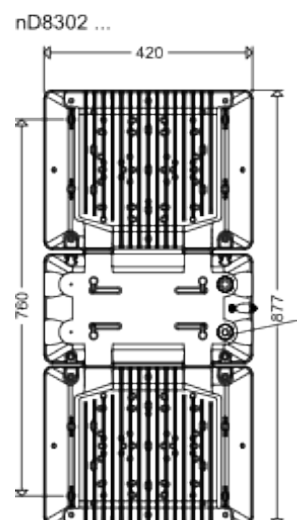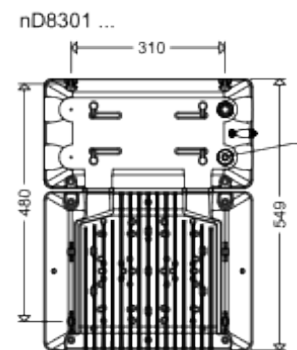

TECHNICAL SPECIFICATIONS

Marking:	II 3G Ex nR IIC T4 Gc II 3D Ex tc IIIC T100°C Dc
Certificate:	Declaration of Conformity
Housing:	Diecast aluminum, DB 702N (mica-iron paint)
Cover:	Tempered safety glass (IK08)
LED:	LED Module 4,000K, CRI >80, L ₇₀ > 100.000h ambient temperature ≤ 50° L ₇₀ > 90.000h ambient temperature >50° L ₈₀ > 100,000h ambient temperature 25°C L ₈₀ > 60,000h at max. ambient T.
Operating temperature:	-20°C to +40°C / +50°C / +60°C
Operating frequency:	50/60 Hz
Rated voltage:	220/240V AC*
DALI:	Digital dimming with DALI interface (DIDM) compatible with LIMAS Line BASIC/PRO Light Management Systems
Ingress protection:	IP65
Connection:	3 poles up to 2,5 mm ²
Cable entries:	1xM25X1,5 plastic cable gland

* Due to the inrush current of the electronic ballasts, the maximum permissible number of light fittings per circuit breaker is limited. surge voltage resistance 4kV, excess temperature protection, overload and short circuit protection.



ACCESSORIES

Type:	Designation:
3301/3302 Y P	1 pair of Y-ropes, (2-point-mounting)
3301/3302 DBF	1 pair of angle brackets for direct ceiling mounting

LED HIGH BAY LIGHT FITTINGS SERIES ND8301/ND8302

Zones 2, 22

Full catalogue available on our website: www.inpratex.com



ITEM REFERENCES

Designation:	Power:	Substitute for:*	Luminous flux:	Luminous efficacy:	T. Max:	Weight:	Item No.:
1 LED wing							
nD8301 L110	67 W	HME 250	10800 lm	161 lm/W	40 °C	8,9 kg	1B0911
nD8301 L160	96 W	HIT 250 / HME 400	15000 lm	156 lm/W	40 °C	8,9 kg	1B0912
nD8301 L210	135 W	HIE 400	20200 lm	150 lm/W	40 °C	8,9 kg	1B0913
nD8301 L110B	67 W	HME 250	10800 lm	161 lm/W	40 °C	9,2 kg	1B0914
nD8301 L160B	96 W	HIT 250 / HME 400	15000 lm	156 lm/W	40 °C	9,2 kg	1B0915
nD8301 L210B	135 W	HIE 400	20200 lm	150 lm/W	40 °C	9,2 kg	1B0916
nD8301 L110TB	67 W	HME 250	10800 lm	161 lm/W	40 °C	9,2 kg	1B0917
nD8301 L160TB	96 W	HIT 250 / HME 400	15000 lm	156 lm/W	40 °C	9,2 kg	1B0918
nD8301 L210TB	135 W	HIE 400	20200 lm	150 lm/W	40 °C	9,2 kg	1B0919
2 LED wing							
nD8302 L320	192 W	HIT 400	30000 lm	156 lm/W	40 °C	14,5 kg	1B0920
nD8302 L420	270 W	2 x HIE 400	40400 lm	150 lm/W	40 °C	14,5 kg	1B0921
nD8302 L320B	192 W	HIT 400	30000 lm	156 lm/W	40 °C	14,6 kg	1B0922
nD8302 L420B	270 W	2 x HIE 400	40400 lm	150 lm/W	40 °C	14,6 kg	1B0923
nD8302 L320TB	192 W	HIT 400	30000 lm	156 lm/W	40 °C	14,6 kg	1B0924
nD8302 L420TB	270 W	2 x HIE 400	40400 lm	150 lm/W	40 °C	14,6 kg	1B0925
For ambient temperatures up to +50°C							
1 LED wing							
nD8301 L110 H50	67 W	HME 250	10800 lm	161 lm/W	50 °C	8,9 kg	1B0926
nD8301 L160 H50	96 W	HIT 250 / HME 400	15000 lm	156 lm/W	50 °C	8,9 kg	1B0927
nD8301 L110B H50	67 W	HME 250	10800 lm	161 lm/W	50 °C	8,9 kg	1B0928
nD8301 L160B H50	96 W	HIT 250 / HME 400	15000 lm	156 lm/W	50 °C	8,9 kg	1B0929
nD8301 L110TB H50	67 W	HME 250	10800 lm	161 lm/W	50 °C	8,9 kg	1B0930
nD8301 L160TB H50	96 W	HIT 250 / HME 400	15000 lm	156 lm/W	50 °C	8,9 kg	1B0931
2 LED wing							
nD8302 L220 H50	134 W	HIE 400	21600 lm	161 lm/W	50 °C	14,5 kg	1B0932
nD8302 L320 H50	192 W	HIT 400	30000 lm	156 lm/W	50 °C	14,5 kg	1B0933
nD8302 L220B H50	134 W	HIE 400	21600 lm	161 lm/W	50 °C	14,6 kg	1B0934
nD8302 L320B H50	192 W	HIT 400	30000 lm	156 lm/W	50 °C	14,5 kg	1B0935
nD8302 L220TB H50	134 W	HIE 400	21600 lm	161 lm/W	50 °C	14,6 kg	1B0936
nD8302 L320TB H50	192 W	HIT 400	30000 lm	156 lm/W	50 °C	14,5 kg	1B0937
For ambient temperatures up to +60°C							
1 LED wing							
nD8301 L110 H60	67 W	HME 250	10800 lm	161 lm/W	60 °C	8,9 kg	1B0938
nD8301 L160 H60	96 W	HIT 250 / HME 400	15000 lm	156 lm/W	60 °C	8,9 kg	1B0939
nD8301 L110B H60	67 W	HME 250	10800 lm	161 lm/W	60 °C	9,2 kg	1B0940
nD8301 L110TB H60	67 W	HME 250	10800 lm	161 lm/W	60 °C	9,2 kg	1B0941
2 LED wing							
nD8302 L220 H60	134 W	HIE 400	21600 lm	161 lm/W	60 °C	14,5 kg	1B0942
nD8302 L320 H60	192 W	HIT 400	30000 lm	156 lm/W	60 °C	14,5 kg	1B0943
nD8302 L220B H60	134 W	HIE 400	21600 lm	161 lm/W	60 °C	14,6 kg	1B0944
nD8302 L220TB H60	134 W	HIE 400	21600 lm	161 lm/W	60 °C	14,6 kg	1B0945

* The given information is for rough orientation only.

LED HIGH BAY LIGHT FITTINGS SERIES ND8301/ND8302

Zones 2, 22

Full catalogue available on our website: www.inpratex.com

INSTALLATION

