

SL 125 COMBINED STATUS LIGHTS - STAINLESS STEEL

Zones 1, 2, 21, 22

Full catalogue available on our website: www.inpratex.com


3



SIGNALLING

ATEX VISUAL SIGNALLING DEVICES

ZONES 1, 2 (gas) & 21, 22 (dust)

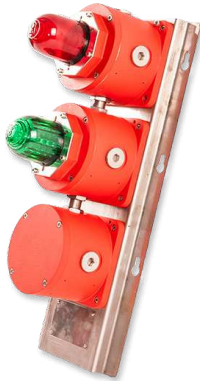

SL-125 combined status lights in stainless steel. This signalling device is certified for use in ATEX zones 1,2 for gas and 21,22 for dust.

Suitable for Oil & Gas, chemical, petrochemical, pharmacy industries, marine and offshore applications.

Possibility to pilot all, or separately the beacons via a telephone line.



EU-Type Examination Certificate

ITEM REFERENCES

Model:	Power consumption:	Weight:	Item No.:
SL-125-A20 24V - 2 beacons	12 - 48V DC	10,2 kg	2A2201
SL-125-A20 220V - 2 beacons	100 - 240V AC	10,2 kg	2A2202
SL-125-B3J 24V - 2 beacons + junction box	12 - 48V DC	15 kg	2A2203
SL-125-B3J 220V - 2 beacons + junction box	100 - 240V AC	15 kg	2A2204
SL-125-B30 24V - 3 beacons	12 - 48V DC	15 kg	2A2205
SL-125-B30 220V - 3 beacons	100 - 240V AC	15 kg	2A2206
SL-125-C4J 24V - 3 beacons + junction box	12 - 48V DC	20 kg	2A2207
SL-125-C4J 220V - 3 beacons + junction box	100 - 240V AC	20 kg	2A2208
SL-125-C40 24V - 4 beacons	12 - 48V DC	20 kg	2A2209
SL-125-C40 220V - 4 beacons	100 - 240V AC	20 kg	2A2210
SL-125-D5J 24V - 4 beacons + junction box	12 - 48V DC	24,5 kg	2A2211
SL-125-D5J 220V - 4 beacons + junction box	100 - 240V AC	24,5 kg	2A2212

Lens colour: Red, Amber, Blue, Green, Clear

TECHNICAL SPECIFICATIONS

Marking:	II 2G Ex d IIC T4...T6 Gb II 2D Ex tb IIIC T135°C...T85°C
Certificate:	EU-Type Examination Certificate
Operating mode:	Steady, rotary, fixed or blinking
Housing:	ENCLOSURE & FRAME: Stainless Steel 316. LENS: Tempered borosilicate glass 3.3
Housing colour:	Black (RAL 9004) Red (RAL 3001) Yellow (RAL 1018) Blue (RAL 5005)
Power:	LED 10W
Light intensity:	312 Cd
Operating temperature:	-40°C to +70°C
Ingress protection:	IP66/67
Cable entries:	3xM20x1,5 holes

