

SEALING CABLE GLANDS FOR ARMoured CABLES

Zones 1, 2, 21, 22

Full catalogue available on our website: www.inpratex.com

ATEX CABLE GLANDS

ZONES 1, 2 (gas) & 21, 22 (dust)



ATEX certified sealing cable glands for explosion-proof Ex d enclosures.


They need an internal airtight seal that prevents the transmission of an internal explosion.

Necessary when using Ex-d flameproof enclosures, with an internal volume greater than 2 litres in Zone 1, containing any source of ignition.



EU-Type Examination Certificate

PMAX DIMENSIONS

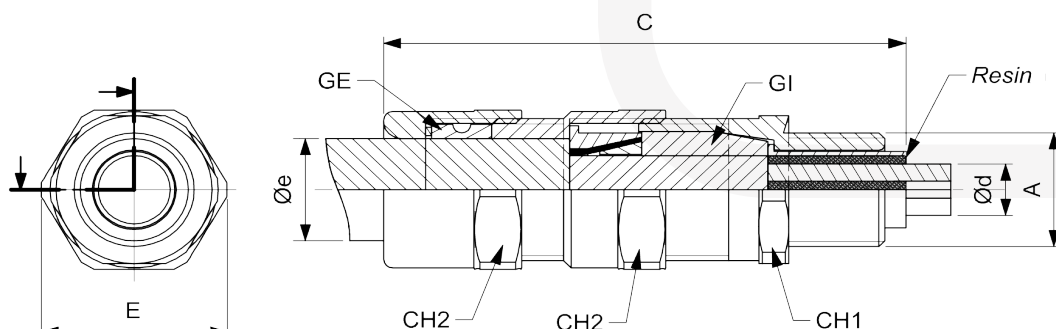

PMAX ITEM REFERENCES - METRIC

Metric:	C:	CH1:	CH2:	E:	GI:	Ød sheath:	GE:	Øe cable:	Weight:	Item No.:
M20x1,5	87	26	28	31	1GI1	4 - 7 mm	1GE1	6 - 10 mm	0,198 kg	7G0101
M20x1,5	87	26	28	31	1GI2	7 - 9,5 mm	1GE2	10 - 13 mm	0,198 kg	7G0102
M20x1,5	87	26	28	31	1GI3	9 - 12 mm	1GE3	13 - 18 mm	0,198 kg	7G0103
M25x1,5	87	31	34	37	2GI1	9 - 12 mm	2GE1	13 - 18 mm	0,262 kg	7G0104
M25x1,5	87	31	34	37	2GI2	12 - 14,5 mm	2GE2	13 - 18 mm	0,262 kg	7G0105
M25x1,5	87	31	34	37	2GI3	14 - 17 mm	2GE3	18 - 23 mm	0,262 kg	7G0106
M32x1,5	109	42	45	49	3GI1	14 - 17 mm	3GE1	18 - 23 mm	0,566 kg	7G0107
M32x1,5	109	42	45	49	3GI2	17 - 20 mm	3GE2	21 - 26 mm	0,566 kg	7G0108
M32x1,5	109	42	45	49	3GI3	20 - 23 mm	3GE3	24 - 30 mm	0,566 kg	7G0109
M40x1,5	109	46	48	53	4GI1	20 - 23 mm	4GE1	24 - 30 mm	0,624 kg	7G0110
M40x1,5	109	46	48	53	4GI2	23 - 26 mm	4GE2	29 - 35 mm	0,624 kg	7G0111
M40x1,5	109	46	48	53	4GI3	26 - 29 mm	4GE3	29 - 35 mm	0,624 kg	7G0112
M50x1,5	109	56	58	64	5GI1	20 - 23 mm	5GE1	26 - 31 mm	0,914 kg	7G0113
M50x1,5	109	56	58	64	5GI2	23 - 26 mm	5GE2	31 - 37 mm	0,914 kg	7G0114
M50x1,5	109	56	58	64	5GI3	26 - 29 mm	5GE3	31 - 37 mm	0,914 kg	7G0115
M50x1,5	109	56	58	64	5GI4	29 - 32 mm	5GE4	36 - 43 mm	0,914 kg	7G0116
M50x1,5	109	56	58	64	5GI5	32 - 35 mm	5GE5	36 - 43 mm	0,914 kg	7G0117
M63x1,5	109	65	68	75	6GI1	35 - 39 mm	6GE1	42 - 46 mm	1,087 kg	7G0118
M63x1,5	109	65	68	75	6GI2	39 - 42 mm	6GE2	45 - 49 mm	1,087 kg	7G0119
M63x1,5	109	65	68	75	6GI3	42 - 45 mm	6GE3	48 - 52 mm	1,087 kg	7G0120

SEALING CABLE GLANDS FOR ARMoured CABLES

Zones 1, 2, 21, 22

Full catalogue available on our website: www.inpratex.com

PMAx ITEM REFERENCES - NPT										
NPT:	C:	CH1:	CH2:	E:	GI:	Ød sheath:	GE:	Øe cable:	Weight:	Item No.:
1/2" NPT	87	26	28	31	1GI1	4 - 7 mm	1GE1	6 - 10 mm	0,198 kg	7G0201
1/2" NPT	87	26	28	31	1GI2	7 - 9,5 mm	1GE2	10 - 13 mm	0,198 kg	7G0202
1/2" NPT	87	26	28	31	1GI3	9 - 12 mm	1GE3	13 - 18 mm	0,198 kg	7G0203
3/4" NPT	87	31	34	37	2GI1	9 - 12 mm	2GE1	13 - 18 mm	0,262 kg	7G0204
3/4" NPT	87	31	34	37	2GI2	12 - 14,5 mm	2GE2	13 - 18 mm	0,262 kg	7G0205
3/4" NPT	87	31	34	37	2GI3	14 - 17 mm	2GE3	18 - 23 mm	0,262 kg	7G0206
1" NPT	109	42	45	49	3GI1	14 - 17 mm	3GE1	18 - 23 mm	0,566 kg	7G0207
1" NPT	109	42	45	49	3GI2	17 - 20 mm	3GE2	21 - 26 mm	0,566 kg	7G0208
1" NPT	109	42	45	49	3GI3	20 - 23 mm	3GE3	24 - 30 mm	0,566 kg	7G0209
1.1/4" NPT	109	46	48	53	4GI1	20 - 23 mm	4GE1	24 - 30 mm	0,624 kg	7G0210
1.1/4" NPT	109	46	48	53	4GI2	23 - 26 mm	4GE2	29 - 35 mm	0,624 kg	7G0211
1.1/4" NPT	109	46	48	53	4GI3	26 - 29 mm	4GE3	29 - 35 mm	0,624 kg	7G0212
1.1/2" NPT	109	56	58	64	5GI1	20 - 23 mm	5GE1	26 - 31 mm	0,914 kg	7G0213
1.1/2" NPT	109	56	58	64	5GI2	23 - 26 mm	5GE2	31 - 37 mm	0,914 kg	7G0214
1.1/2" NPT	109	56	58	64	5GI3	26 - 29 mm	5GE3	31 - 37 mm	0,914 kg	7G0215
1.1/2" NPT	109	56	58	64	5GI4	29 - 32 mm	5GE4	36 - 43 mm	0,914 kg	7G0216
1.1/2" NPT	109	56	58	64	5GI5	32 - 35 mm	5GE5	36 - 43 mm	0,914 kg	7G0217
2" NPT	109	65	68	75	6GI1	35 - 39 mm	6GE1	42 - 46 mm	1,087 kg	7G0218
2" NPT	109	65	68	75	6GI2	39 - 42 mm	6GE2	45 - 49 mm	1,087 kg	7G0219
2" NPT	109	65	68	75	6GI3	42 - 45 mm	6GE3	48 - 52 mm	1,087 kg	7G0220

TECHNICAL SPECIFICATIONS	
Marking:	II 2G Ex d IIC / Ex e II II 2D Ex tD A21
Certificate:	EU-Type Examination Certificate
Operating conditions:	Indoor / Outdoor
Material:	Nickel plated brass
Ingress protection:	IP66
Operating temperature:	-40°C to +100°C

ACCESSORIES	
Designation:	Item No.:
Bicomponent resin REPM-1 50 ml	7G0501
Manual applicator for 50 ml cartridges	7G0502

