

XPP-5460GX LOW-PROFILE DUAL-LIGHT HEADLAMP

Zones 0, 1, 2

Full catalogue available on our website: www.inpratex.com


ATEX HEADLAMPS

ZONES 0, 1, 2 (gaz)

This X-Series Intrinsically Safe low-profile Dual-Light headlamp is cULus, ATEX and IECEx listed Intrinsically Safe and is designed specifically to work on fire helmets and hard-hats that have a flip-up face shield.



Focused high/low-brightness spotlight beam for distance illumination.
 Unfocused high/low-brightness wide-beam floodlight for close-up illumination.
 Dual-Light (spotlight and floodlight on at the same time) for maximum versatility.

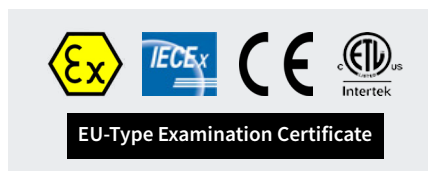

The XPP-5462GX includes a heavy-duty rubber head strap for use on a fire helmet or hard-hat, and is powered by 3 AAA batteries (included).

ITEM REFERENCES

Model:	Item No.:
XPP-5460GX	1E1401

TECHNICAL SPECIFICATIONS

Marking: ATEX	II 1G Ex ia IIC T4 Ga
Marking: NEC 500	CLASS I DIV 1 GRPS A-D T4 CLASS II & III DIV 1 GRPS E-G CLASS I ZONE 0 GRP IIC T4 CLASS II ZONE 20 IIIC T135°C
Certificate:	EU-Type Examination Certificate
Ingress protection:	IP67
Lamp:	CREE LED (50,000 + hours LED life)
Run time:	Flashlight: High 3,5 h Low 10 h Floodlight: High 3,5 h Low 10 h Dual-Light: 3 h
Luminous flux:	Flashlight: High:180 lm Low 100 lm Floodlight: High 180 lm Low 100 lm Dual-Light: 200 lm
Beam distance:	106 m
Batteries:	3 Alkaline AAA batteries (included)
Weight:	165 g
Dimesions:	90 x 40 x 47 mm
Operating temperature:	-20°C to +40°C